


TRENCH TYPE CONSTRUCTION OF GRAVEL ROAD



FEATHER EDGE TYPE CONSTRUCTION OF GRAVEL ROAD

Construction

1. The subgrade is prepared to proper gradient, camber and compacted well.
2. On the prepared subgrade, a mixture of gravel, earth and sand are spread to the required thickness.
3. The compacted depth of gravel roads is generally 200mm. It is obtained in two layers, each of compacted thickness of about 100mm.
4. The layer is rolled by using smooth wheeled light rollers starting from the edges and proceeding towards the centre.
5. During rolling, proper gradient and camber are maintained and sufficient care is to be taken to see that no pebbles get crushed under the roller.
6. The camber is checked at regular intervals and it is corrected if necessary.
7. A thin layer of sand of about 5mm to 10mm thickness is provided before opening the road to traffic.




3. Construction of Water Bound Macadam Road

Construction

The W.B.M. road is constructed in the following stages

1. Subgrade
2. Sub-base
3. Base
4. Wearing course
5. Providing berms
6. Opening for traffic

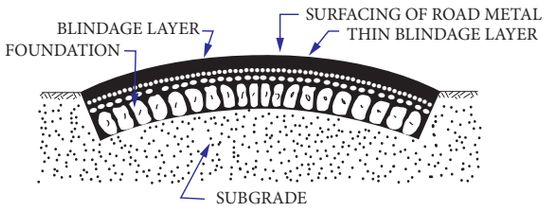

WATERBOUND MACADAM ROAD

1. Subgrade and kerbs

The subgrade is prepared to the required grade and camber by filling up the depressions and pot holes. The corrugations are removed by scarifying. Stone kerbs are then provided at the ends of the subgrade.

2. Sub-base

If necessary, the sub-base is prepared with locally available granular materials over the whole width of formation and rolled to the shape of the camber.

3. Base or foundation course

12 to 18mm size boulders or broken stones is spread and hand packed with as little voids as possible. The surface is rolled with 10-ton roller. The rolling should be started from edge of road to the centre.

4. Wearing course

This can be laid in one or two layers, each layer not exceeding

U6.indd 120 1/10/2020 1:35:01 PM