application of bitumen at the specified rate without accumulation at any particular spot.

4. Rolling

It is then rolled by a medium roller until the chippings are thoroughly embedded in the bitumen. This can be observed when there is no movement of any metal while the roller is moving on the surface.

5. Finishing

The surface is then cleaned and it is checked for its cross profile. A tolerance of 2mm in thickness per metre length is permitted. The road is then opened for traffic after 24 hours.


Activity 2

Prepare a report on the stages of road construction in your nearby locality with pictures.

5. Construction of Cement Concrete Road

Concrete road surfacing is superior than other kinds of road surfacing. The cement concrete road provides rigid surface.



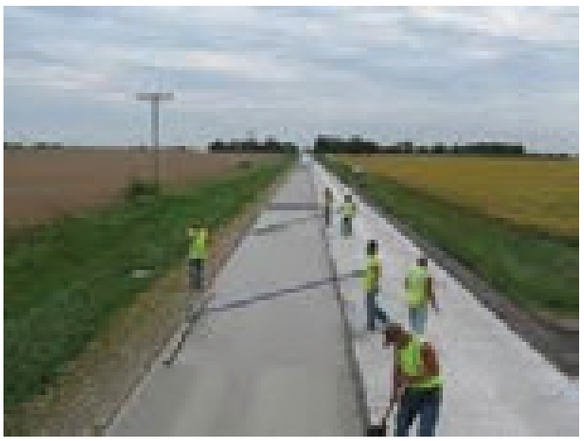


Methods of Construction of Cement Concrete Roads

i. Alternative bay method
ii. Continuous bay method


i. Alternative bay method

In this method, if the roads are of single lane, it is divided into suitable bays of 6m to 8m length and the construction work is carried out in alternate bays as shown in the fig. below.

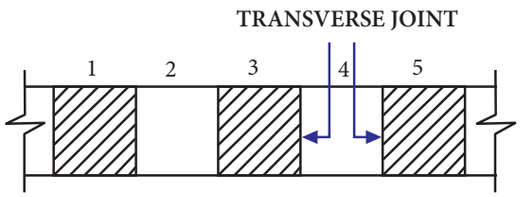

SINGLE LANE ROAD

If the roads are of double lane, the construction work is carried out in alternate bays as in fig. below.

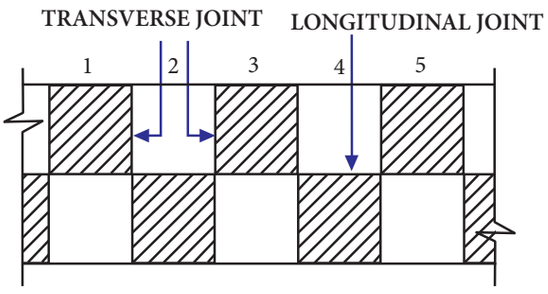

DOUBLE LANE ROAD

U6.indd 122 1/10/2020 1:35:02 PM