15cm, depending upon the total thickness required. This includes following steps,

a. Spreading the metal

b. Rolling dry

c. Screeding and wet rolling

d. Topping, watering and rolling


e. Curing

5. **Providing berms**

Usually, earthen berms with outward slope are provided. By filling earth by the side of the kerbs the level is raised to the top of road surface.

6. **Opening for traffic**

After curing the road is opened for traffic.

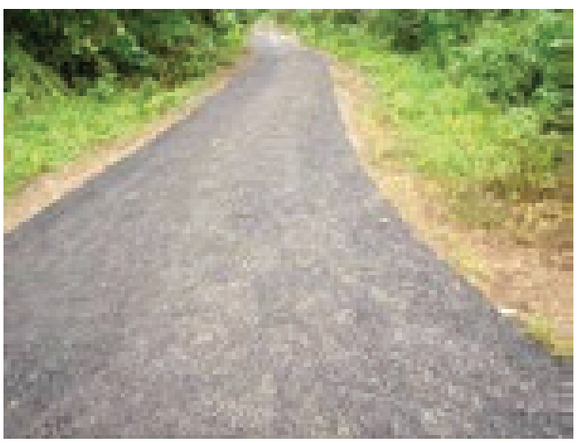

Defects Of WBM Road

i. Formation of pot-holes and ruts due to the loss of soil binder by rain water washing.

ii. Disintegration of road materials caused by the large variation of temperature.

iii. Damage caused by heavy traffic.

iv. Excessive tensile stresses induced into the top layer of pavement due to wheel load.


v. Loosening of surface metal by suction of binder caused by the fast-moving rubber tyred wheels.

vi. Crushing of road metal due to attrition and impact by steel-tyred wheels.

vii. Blowing of the crushed and pulverised road metal by wind or by fast moving vehicles.

4. Construction of Bituminous Road

There are number of techniques for the construction of bituminous road. Here we will discuss about surface dressing with single coat.

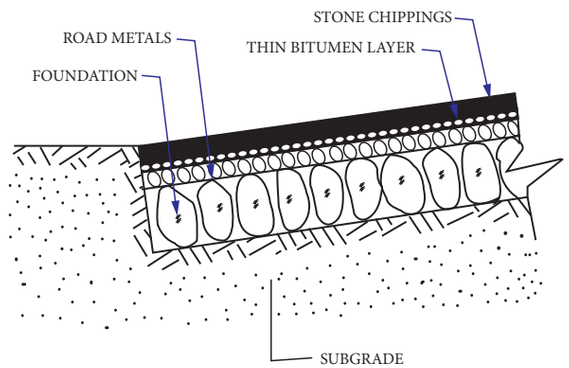

BITUMEN SURFACE DRESSING (SINGLE COAT)

The construction procedure is as follows

1. **Preparation of road surface**

The road surface is prepared to the required shape of camber by removing all the depressions, pot-holes, ruts, etc.,

2. **Application of bitumen**

The bitumen is heated to the desired temperature and it is applied uniformly on the prepared road surface at the specific rate.

3. **Spreading the stone chippings**

The chippings are spread on the surface immediately after the

U6.indd 121 1/10/2020 1:35:01 PM